


TYPICAL BUILDING SEWER INSTALLATION PLAN



CONSTRUCTION NOTES:

1. ALL CHANGES IN DIRECTION SHALL BE MADE WITH 1/16 BENDS (22 1/2 DEGREES). 1/8 BENDS (45 DEGREES) SHALL BE WYE BRANCHES WITH STRAIGHT-THROUGH OPENING PLUGGED FOR CLEANOUT.
2. SLOPE SHALL BE AT LEAST 2%
3. ALL PIPE IS TO BE BEDDED IN PEA GRAVEL. 4" ABOVE AND BELOW PIPE
4. HOUSE CONNECTION MUST BE MADE AT TIME OF SIDE SEWER CONSTRUCTION.
5. ALL WORK SHALL BE ACCOMPLISHED IN ACCORDANCE WITH THE WASHINGTON INDUSTRIAL SAFETY AND HEALTH ACT. (WSHA)
6. NO WORK CAN BE DONE IN THE RIGHT-OF-WAY WITHOUT A PERMIT FROM THE CITY, COUNTY, OR STATE. DO NOT PROCEED TO WORK IN THE RIGHT-OF-WAY WITHOUT DISTRICT APPROVAL.
7. REDUCER SHALL BE PVC
8. CONNECTIONS OF SIDE SEWERS TO AN EXISTING SEWER LINE SHALL BE MADE AS FOLLOWS, OR AS DIRECTED BY THE DISTRICT ENGINEER.

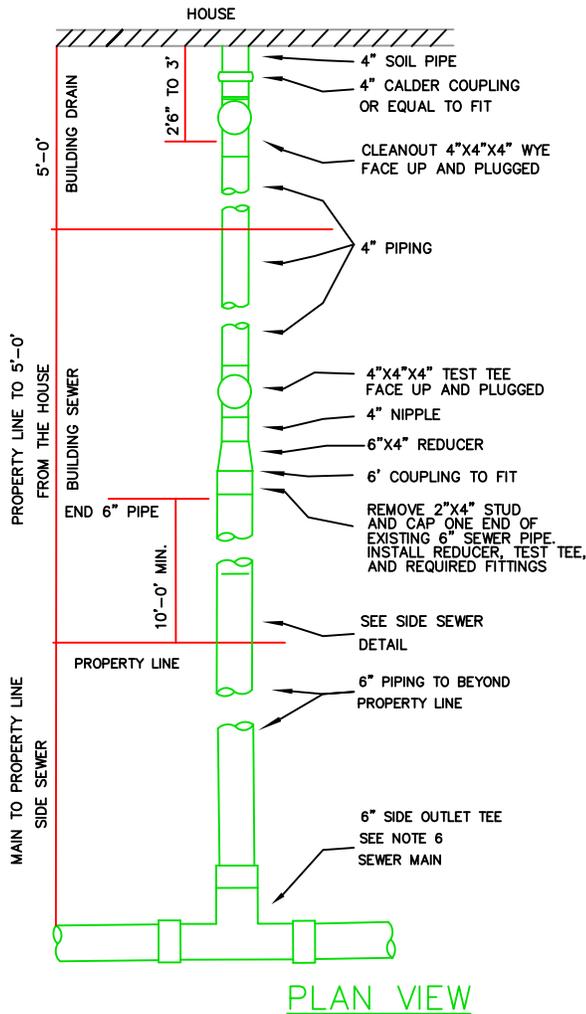